

**SOUND ABSORPTION COEFFICIENT  $\alpha_s$   
OF BAFFLES**

**Test 18**  
**Date 27/06/17**  
**Station ALPHA**

AA79

**REQUESTER, MANUFACTURER SAINT-GOBAIN ECOPHON**

**NAME Solo Baffle 1200 x 600 x 40**

**FITNESS FOR PURPOSE Unchecked**

**CONFIGURATION 600 mm overall depth of construction, oriented in rows cc  
800 mm**

**STANDARDS EN ISO 354, EN ISO 11654 and EN 16487**


**MAIN CHARACTERISTICS**

Total test area in m<sup>2</sup> : 11.46  
Thickness of a baffle in mm : 40  
Mounting type : J

**MEASUREMENT CONDITIONS**

**Empty room:** Temperature: 23.5 °C  
Relative humidity: 64 %  
**Room with sample:** Temperature: 23.5 °C  
Relative humidity: 64 %

**RESULTS**

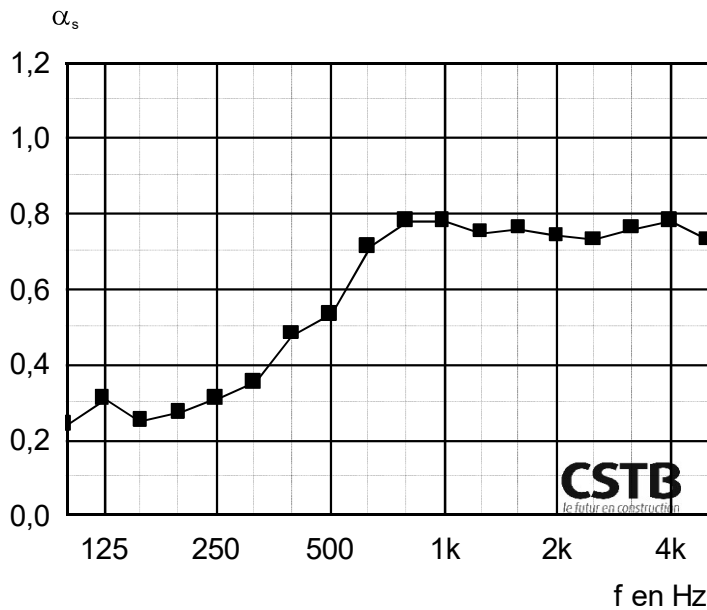

f	$\alpha_s$
100	0,24
125	0,31
160	0,25
200	0,27
250	0,31
315	0,35
400	0,48
500	0,53
630	0,71
800	0,78
1000	0,78
1250	0,75
1600	0,76
2000	0,74
2500	0,73
3150	0,76
4000	0,78
5000	0,73
Hz	

$\alpha_w = 0,55(H) *$   
classement : D

NRC = 0,60  
SAA = 0,60

\* It is strongly recommended to use this single number rating in combination with the complete sound absorption coefficient curve.